



# Taylor Valve Technology

# Environmental Protection Cap

IT SQUEAKS WHEN IT LEAKS

## FEATURES

### AUDIBLE LEAK DETECTION

A whistle installed in the EPC gives a shrill noise indication in the event that the relief valve is leaking. A leak is an extreme environmental hazard with hydrocarbons.

### WILL NOT FLY AWAY

If a system upset occurs, the relief valve opens to vent excess pressure and the EPC is discharged from the pipe. The strong polyester tether assures that the EPC will remain with the valve.

### ACCURACY

Pressure above 2.0 oz. per sq. in. will cause the whistle to activate and pressures above 4.0 oz. per sq. in. will cause the cap to discharge from the pipe.

### EXTREME VISIBILITY

The EPC ensures valve and system protection from environmental elements, enhancing service life and limiting repair costs. A unique lanyard design and a leak detection capability set this apart from competitive products.

### APPLICATIONS

Valve and System Protection, Leak Detection



Environmental Products  
**EPC**

## INSTALLATION

It's simple and there is no adjustment or special procedure.

- 1 Drop tether loop over the outlet of the vent pipe.
- 2 Place the EPC on the outside of the pipe opening and push down.

## SPECIFICATIONS

- Will withstand discharge pressures up to 3000 PSI.
- Durable construction & the highly engineered plastic compound translates into a very long service life.
- Designed to pair with valve sizes 1/2" through 4".

NOTE: Taylor Valve reserves the right to change product designs and specifications without notice.

## Taylor Valve Technology

8300 S.W. 8th Street  
Oklahoma City, Oklahoma 73128

TEL 405.787.0145

FAX 800.805.3401

WEB [taylorvalve.com](http://taylorvalve.com)

INFO [info@taylorvalve.com](mailto:info@taylorvalve.com)

[www.taylorvalve.com](http://www.taylorvalve.com)



# Taylor Valve Technology


# Environmental Protection Cap

# FINALLY, A PERMANENT EPC!

No more climbing  
to replace those on the market.

Save your valuable time with a  
thoroughly tested solution. It is  
important that rain, ice and dirt  
not damage the effectiveness of  
your relief valve.

The discharge area of this EPC  
is approximately 1-1/2 times the  
discharge area of a conventional  
relief valve.

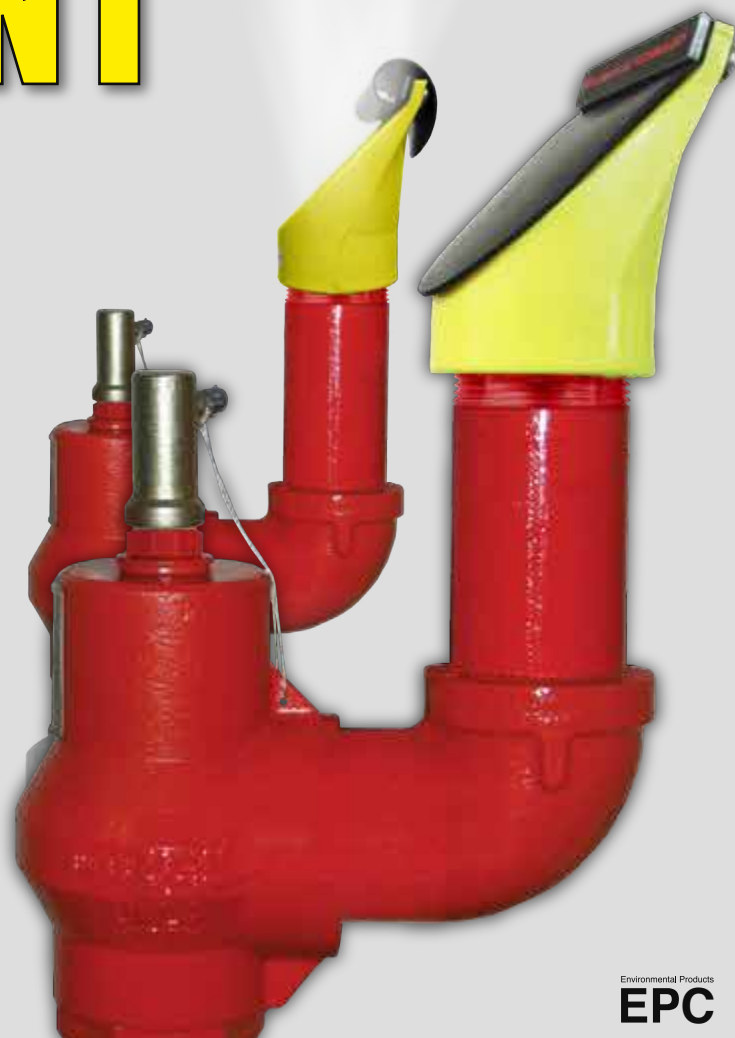

Environmental Products  
**EPC**

## INSTALLATION

Is extremely simple with no  
special adjustment or procedure.

Simply screw threaded EPC over  
the end of a threaded pipe,  
hand tighten.

## SPECIFICATIONS

- Will withstand discharge pressures  
up to 3000 PSI.
- Durable construction & the highly  
engineered plastic compound  
translates into a very long service life.
- Designed to pair with valve sizes  
1" through 2".

NOTE: Taylor Valve reserves the right to change product designs and  
specifications without notice.

**Taylor Valve Technology**

8300 S.W. 8th Street

Oklahoma City, Oklahoma 73128

TEL 405.787.0145

FAX 800.805.3401

WEB [taylorvalve.com](http://taylorvalve.com)

INFO [info@taylorvalve.com](mailto:info@taylorvalve.com)

[www.taylorvalve.com](http://www.taylorvalve.com)